REPUBLIC OF THE PHILIPPINES
PROVINCE OF SOUTH COTABATO
CITY OF KORONADAL

CONSTRUCTION OF TENNIS COURT

PHILIPPINE SCIENCE HIGH SCHOOL SOCCSKSARGEN
REGION CAMPUS IN KORONADAL CITY
BRGY. PARAISO, CITY OF KORONADAL

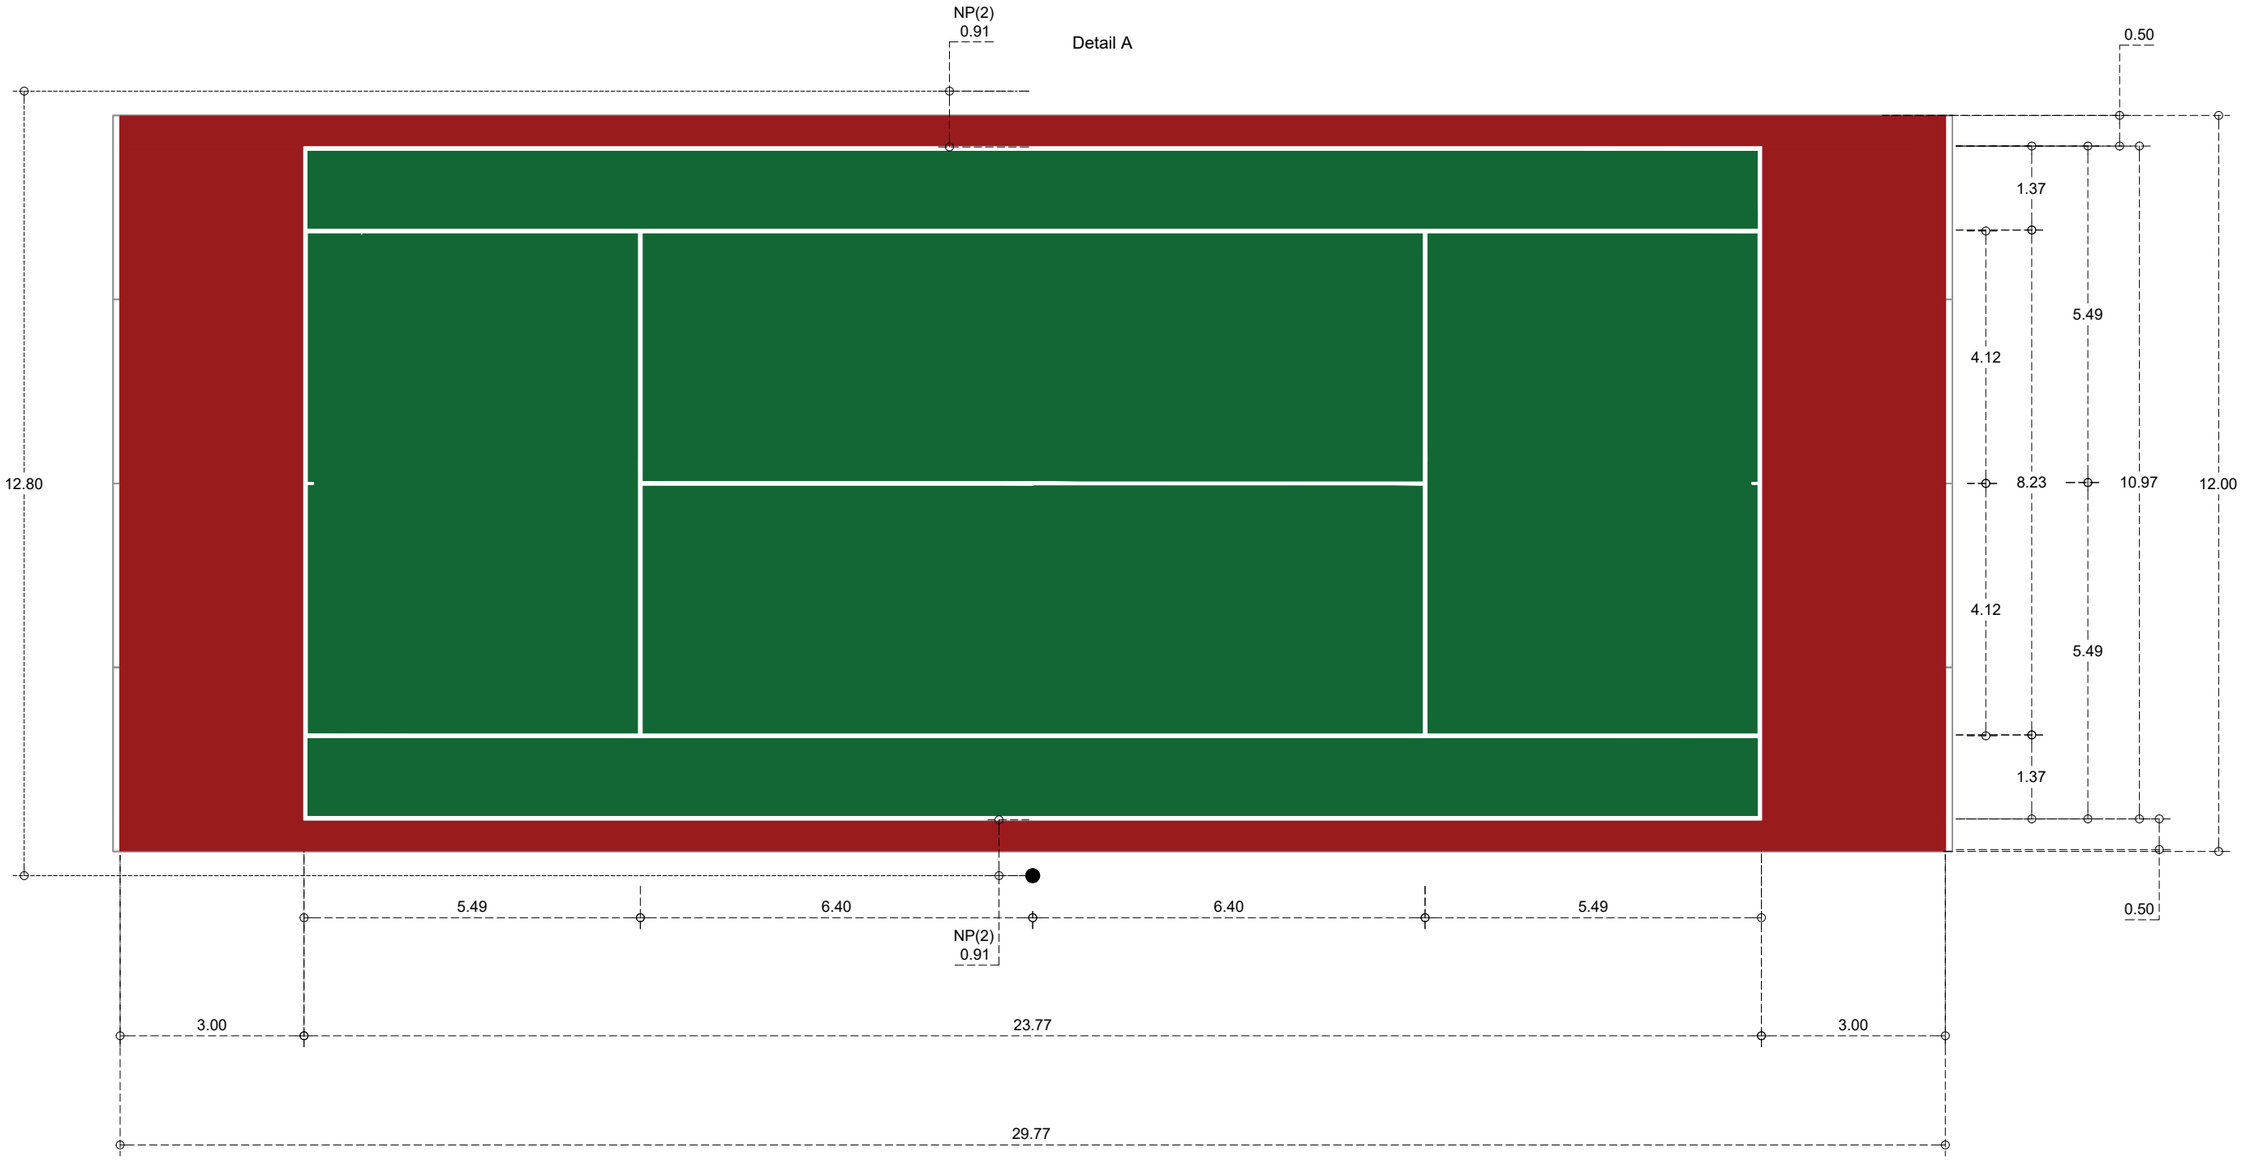

	PREPARED BY:	CHECKED BY:	REVIEWED BY:	PROJECT TITLE:	RECOMMENDING APPROVAL:	APPROVED BY:	SHEET NO:	
REPUBLIC OF THE PHILIPPINES PROVINCE OF SOUTH COTABATO CITY OF KORONADAL **BDP**	ENGR. SEVERINO JOHNROME E. USERO	ENGR. JAYSON CANTOR	ENGR. JOHN JOVI Z. ANGOR	CONSTRUCTION OF TENNIS COURT	ENGR. RUEL C. TIANCHON, MPA, REA, REB	ATTY. ELIORDO U. OGENA	S-01	
	ENGINEER- I	*ENGINEER-I*	*ENGINEER- IV/BDP COORDINATOR*	*LOCATION: CITY OF KORONADAL*	*CITY ENGINEER*	*CITY MAYOR*	01	02

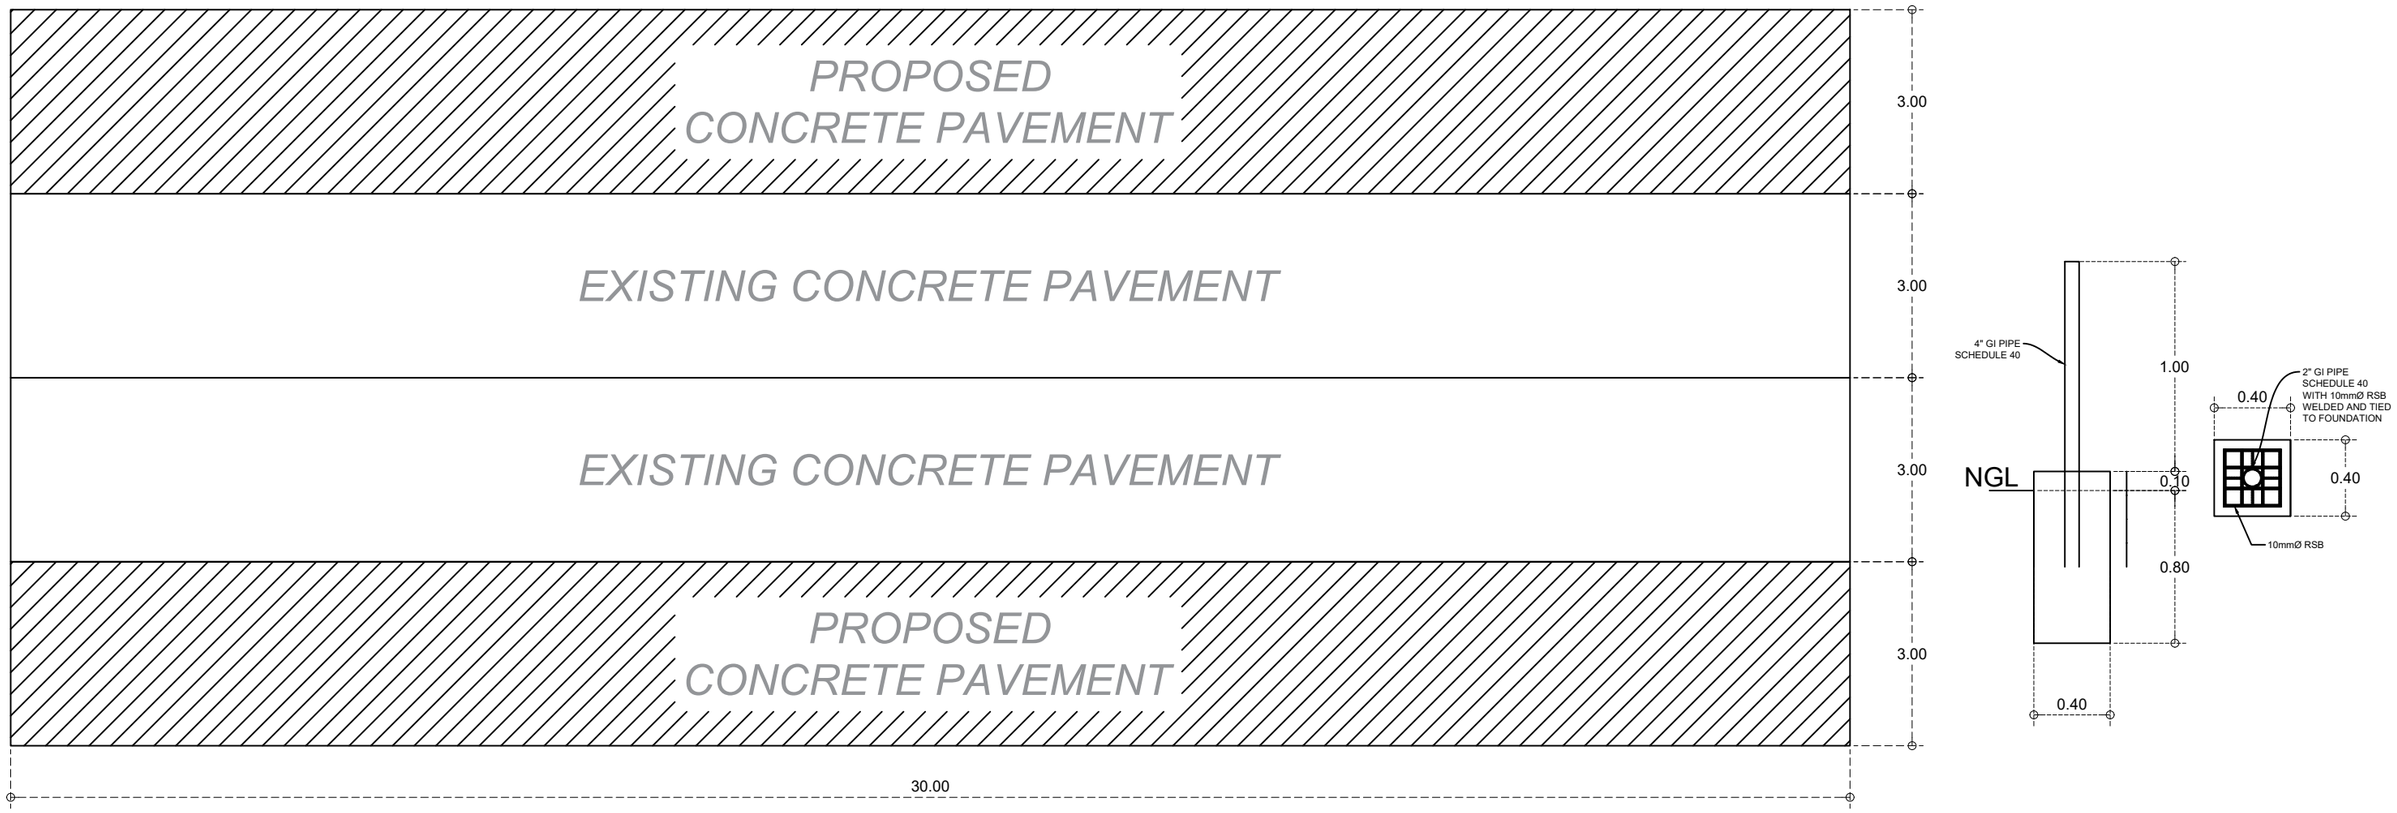

REPUBLIC OF THE PHILIPPINES PROVINCE OF SOUTH COTABATO CITY OF KORONADAL BDP	PREPARED BY:	CHECKED BY:	REVIEWED BY:	PROJECT TITLE:	RECOMMENDING APPROVAL:	APPROVED BY:	SHEET NO:	
	ENGR. SEVERINO JOHNROME E. USERO	ENGR. JAYSON CANTOR	ENGR. JOHN JOVI Z. ANGOR	CONSTRUCTION OF TENNIS COURT	ENGR. RUEL C. TIANCHON, MPA, REA, REB	ATTY. ELIORDO U. OGENA	S-02	
	ENGINEER- I	ENGINEER-I	ENGINEER- IV/BDP COORDINATOR	LOCATION: CITY OF KORONADAL	CITY ENGINEER	CITY MAYOR	02	02

Republic of the Philippines
Province of South Cotabato
City of Koronadal
CITY MAYORS OFFICE - BARANGAY DEVELOPMENT PROGRAM

Project Title: **CONSTRUCTION OF TENNIS COURT**
Location: **PHIL SCI HIGH SCHOOL**
Project Cost: **₱419,000.12**
Duration: **12.00 Working Days**

PROGRAM OF WORKS

ITEM SCOPE OF WORKS

I **MOBILIZATION AND LAYOUT** QUANTITY = **1.00** **ls**

Labor

	NO. OF PERSONS	NO. OF DAYS	RATE PER DAY	AMOUNT
Construction Foreman	1.00	1.00	718.00	718.00
Skilled Worker	1.00	1.00	490.72	490.72
Laborer	2.00	1.00	442.50	885.00
			SUB TOTAL =	2,093.72
			DIRECT COST	2,093.72
			UNIT COST =	2,093.72

II **SITE CLEARING & EARTHWORKS** QUANTITY = **1.00** **ls**

Labor

	NO. OF PERSONS	NO. OF DAYS	RATE PER DAY	AMOUNT
Construction Foreman	1.00	5.00	718.00	3,590.00
Skilled Worker	2.00	5.00	528.80	5,288.00
Laborer	4.00	5.00	442.50	8,850.00
			SUB TOTAL =	17,728.00
			DIRECT COST	17,728.00

Materials

	QUANTITY	UNITS	UNIT COST	AMOUNT
Backfill	3.00	cu.m.	600.00	1,800.00
			SUB TOTAL =	1,800.00
			DIRECT COST	19,528.00
			UNIT COST =	19,528.00

III **SUBGRADE PREPARATION** QUANTITY = **180.00** **sq.m.**

Labor

	NO. OF PERSONS	NO. OF DAYS	RATE PER DAY	AMOUNT
Construction Foreman	1.00	4.00	718.00	2,872.00
Skilled Worker	2.00	4.00	528.80	4,230.40
Laborer	4.00	4.00	442.50	7,080.00
			SUB TOTAL =	14,182.40

Materials

	QUANTITY	UNITS	UNIT COST	AMOUNT
Granular base (G-1)	15.00	cu.m.	1,825.00	27,375.00
W. Sand	5.00	cu.m.	600.00	3,000.00
			SUB TOTAL =	30,375.00
			DIRECT COST	44,557.40
			UNIT COST =	247.54

V **CONCRETE POURING WORKS** QUANTITY = **180.00** **sq.m.**

Labor

	NO. OF PERSONS	NO. OF DAYS	RATE PER	AMOUNT
Construction Foreman	1.00	6.00	718.00	4,308.00
Skilled Worker	3.00	6.00	528.80	9,518.40
Laborer	6.00	6.00	442.50	15,930.00
			SUB TOTAL =	29,756.40

Materials

	QUANTITY	UNITS	UNIT COST	AMOUNT
Premium Portland Cement ASTM C595	200.00	bags	300.00	60,000.00
W. Sand	11.00	cu.m	600.00	6,600.00
Gravel (3/4")	22.00	cu.m	1,750.00	38,500.00
1 Bagger Mixer (Fuel)	600.00	liters	75.00	45,000.00
			SUB TOTAL =	150,100.00
			DIRECT COST	179,856.40
			UNIT COST =	999.20

VI **CURING & PROTECTION** QUANTITY = **180.00** **sq.m.**

Labor

	NO. OF PERSONS	NO. OF DAYS	RATE PER	AMOUNT
Laborer	1.00	28.00	442.50	12,390.00
			SUB TOTAL =	12,390.00

VII **NET POST** QUANTITY = **2.00** **pcs**

Labor

	NO. OF PERSONS	NO. OF DAYS	RATE PER	AMOUNT
Construction Foreman	1.00	1.00	718.00	718.00
Skilled Worker	1.00	1.00	528.80	528.80
Laborer	2.00	1.00	442.50	885.00
				2,131.80

Materials

	QUANTITY	UNITS	UNIT COST	AMOUNT
G.I Pipe 2" S40	1.00	length	2,475.00	2,475.00
Def. Bar 10mm x 6m, Grade 40	2.00	lengths	160.00	320.00
Tie Wire #16	0.50	kgs	120.00	60.00
			SUB TOTAL =	2,855.00
			DIRECT COST	4,986.80
			UNIT COST =	2,493.40

VII **SURFACE FINISHING & PAINTING** QUANTITY = **180.00** **sq.m.**

Labor

	NO. OF PERSONS	NO. OF DAYS	RATE PER	AMOUNT
Construction Foreman	1.00	10.00	718.00	7,180.00
Skilled Worker	1.00	10.00	528.80	5,288.00
Laborer	2.00	10.00	442.50	8,850.00
			SUB TOTAL =	21,318.00

Materials

	QUANTITY	UNITS	UNIT COST	AMOUNT
Crack filler / patch mortar	10.00	kg	250.00	2,500.00
Acrylic concrete primer / sealer (sports flooring compatible)	70.00	L	300.00	21,000.00
Acrylic sports court paint (non-slip, UV resistant) - BASE COAT	180.00	L	500.00	90,000.00
Paint Reducer	20.00	L	200.00	4,000.00
WHITE MARKING PAINT	20.00	L	450.00	9,000.00
Masking Tape	20.00	rolls	100.00	2,000.00
Rollers and Tray	10.00	sets	280.00	2,800.00
			SUB TOTAL =	131,300.00
			DIRECT COST	152,618.00
			UNIT COST =	847.88

VIII **BILLBOARD** QUANTITY = **1.00** **unit**

Labor

	NO. OF PERSONS	NO. OF DAYS	RATE PER DAY	AMOUNT
Skilled Worker (Carpenter)	1.00	1.00	528.80	528.80
Laborer	1.00	1.00	441.00	441.00
			SUB TOTAL =	969.80

Materials

	QUANTITY	UNITS	UNIT COST	AMOUNT
Tarpaulin with wood Frame (8'x8')	1.00	lots	2,000.00	2,000.00
			SUB TOTAL =	2,000.00
			DIRECT COST	2,969.80
			UNIT COST =	2,969.80

TOTAL MATERIAL COST =	**₱318,430.00**
TOTAL LABOR COST =	**₱100,570.12**
TOTAL PROJECT COST =	**₱419,000.12**

PREPARED BY:

ENGR. SEVERINO JOHNROME E. USERO
ENGINEER I

REVIEWED BY:

ENGR. JOHN JOVI Z. ANGOR
BDP COORDINATOR

RECOMMENDING APPROVAL:

ENGR. RUEL C. TIANCHON, MPA, REA, REB
CITY ENGINEER

APPROVED BY:

ATTY. ELIORDO U. OGENA
CITY MAYOR